

8" Rimless *USB* LED Monitor



Features


1. Rimless front bezel design
2. Integrated with protection glass (**MF080UG**) or 5 wires resistive flat touch (**MF080UR**) or PCAP touch (**MF080UP**)
3. Small footprint
4. VESA 75 x 75 mm wall mounting standard
5. Sleek surface throughout monitor's appearance
6. Optional tool-free height adjustment pole base
7. Smart cable management
8. Tilting angle adjustment up to 120° (L/R) / 30° (upward)
9. Low power consumption only 2.5W with LED backlight

Specification

| Model | MF080UG / MF080UR / MF080UP |
|------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Cabinet Color | Black or White |
| Cover Lens | Mitsubishi PMMA Hardness > 5H (JIS D0202), T > 93% (MF080UG) 5 wires resistive flat touch (MF080UR) / PCAP touch (MF080UP) |
| Display Type | 8" diagonal TFT active matrix with LED backlight |
| Recommended Resolution | 800 x 600 |
| Brightness | 250 cd/m ² (typ.) |
| Contrast Ratio | 500:1 (typ.) |
| Viewing Angle | 140° (H) / 125° (V) |
| I/O Connectivity | Mini USB |

* Specification is subject to be changed without prior notice.

Dimension (unit: mm)

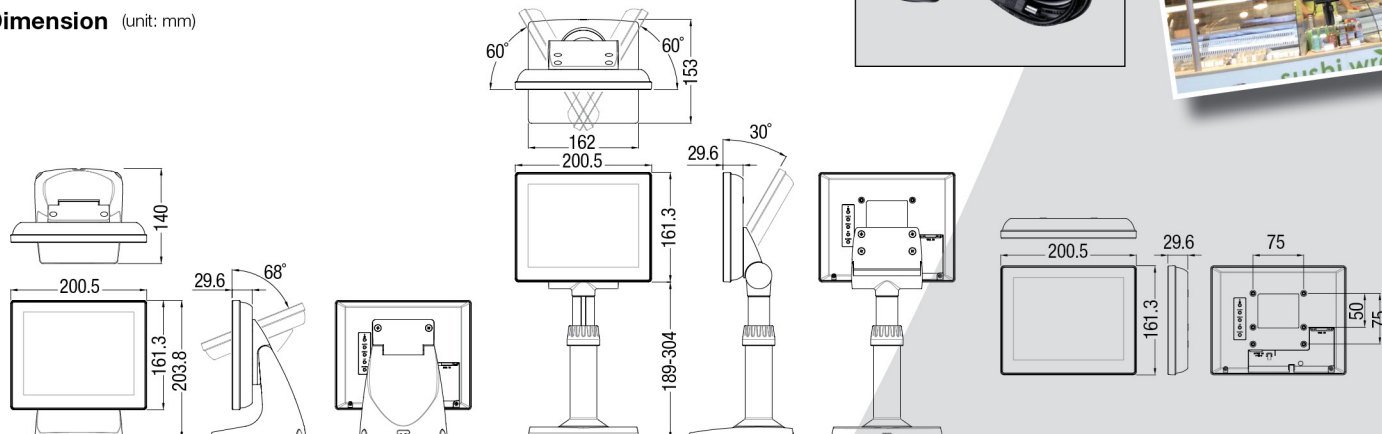

Applications: Supermarket/Chain stores Hospitality/Factory automation

