

8" Rimless POS LCD Monitor



Features


1. Rimless front bezel design.
2. Integrated with protection glass (**Model: MF080VG**) or 5 wires resistive flat touch (**Model: MF080VR**) or PCAP touch (**Model: MF080VP**)
3. Small footprint
4. VESA 75 x 75 mm wall mounting standard
5. User friendly OSD control buttons
6. Sleek surface throughout monitor's appearance
7. Smart cable management
8. Tilting angle adjustment up to 68°
9. Low power consumption only 6W with LED backlight
10. Support 1024x768 @60Hz

Specification

Model	MF080VG / MF080VR / MF080VP
Cabinet Color	Black or White
Cover Lens	Mitsubishi PMMA (MF080VG) 5 wires resistive flat touch (MF080VR) / PCAP touch (MF080VP)
Display Type	8" diagonal TFT active matrix with LED backlight
Recommended Resolution	800 x 600 or 1024 x 768 @60Hz
Brightness	250 cd/m ² (typ.)
Contrast Ratio	500:1 (typ.)
Viewing Angle	125° (H) / 140° (V)
I/O Connectivity	D-Sub 15 pins (1.8 meters cable)
Backlight MTBF	20,000 hrs

* Specification is subject to be changed without prior notice.

Dimension (unit: mm)

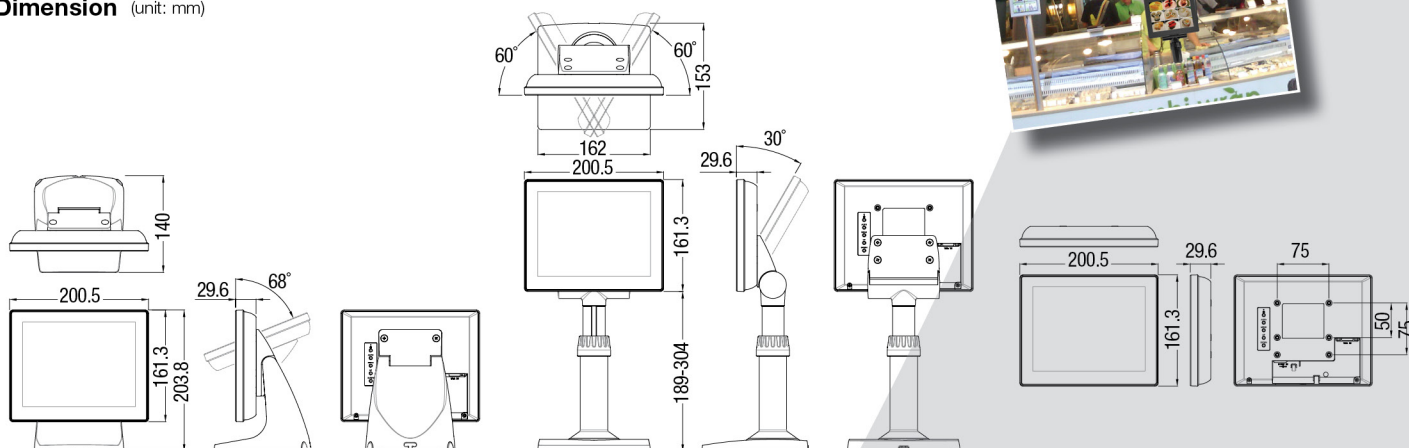

Applications:

Supermarket/Chain stores/Hospitality/
Factory automation

