

10.4" Rimless USB LCD Monitor



New Capacitive Touch keys control design provide high durability of operation, also with a thin & whole flat front panel gives an elegant and compact appearance.

Features

1. Rimless front bezel design
2. Low power consumption with LED backlight
3. Sleek surface throughout monitor's appearance
4. VESA 75 x 75 mm wall mounting standard
5. Integrated protection glass (**MF104UG**)
or 5 wires Resistive touch (**MF104UR**)
6. USB Powered


Specification

Model	MF104UG / MF104UR
Cabinet Color	Black or White
Cover Lens	Mitsubishi PMMA Hardness > 5H (JIS D0202), T > 93% (MF104UG) 5 wires Resistive touch (MF104UR)
Display Type	10.4" diagonal TFT active matrix with LED backlight
Recommended Resolution	800 x 600
Panel Brightness	300 cd/m ² (typ.)
Contrast Ratio	500:1 (typ.)
Viewing Angle	150° (H) / 110° (V)
I/O Connectivity	Mini USB x 1, DC 12V in
DC Power	Optional power adaptor

* Specification is subject to be changed without prior notice.






I/O indication

MF104UG / MF104UR

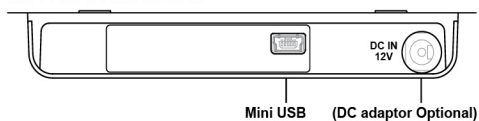

Dimension (unit: mm)

Touch Metal Stand (Optional)

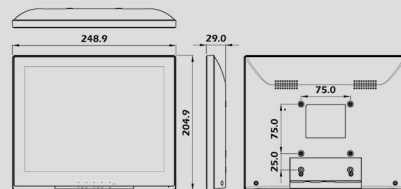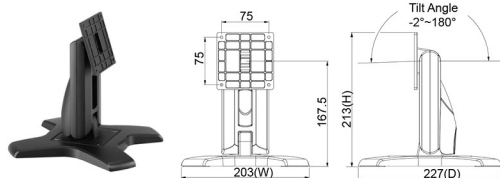


Applications:


SOHO/Chain stores/Hospitality/POS Customer display



USB Multiple Display w/NB

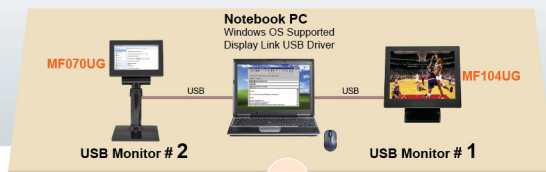

USB Monitor Application w/PC

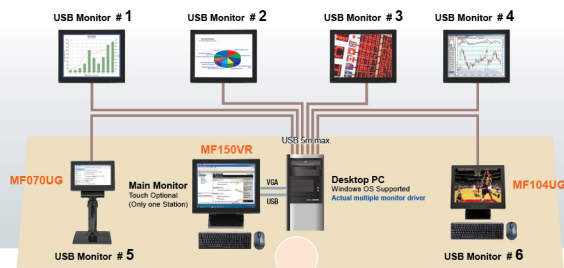

All USB Monitors are optional, and function is assigned by User.
Only six USB Monitors could be connected in a PC system.
All USB Monitors are extended-display of Main Monitor.